

CBP-3 Series

Compact Stainless Steel Back Pressure Regulators

Introduction

The CBP-3 Series is a compact back pressure regulator with some of the time proven features of the BP-3 Series and new features evolving the compact size. This regulator is designed to allow the construction of compact sophisticated analytical instrumentation where the optimum in back pressure control is required. Standard features allow service in many varied applications including corrosive fluids and with the optional features available, the user can tailor this regulator to virtually any application requiring small to moderate flow rates.



Typical Applications

- Analytical instrumentation
- Gas and liquid sampling
- Petrochemical industry
- Air compressors
- Research labs
- Pilot plants

Technical Data

CONSTRUCTION	316L stainless steel
ADJUSTABLE STANDARD PRESSURE RANGES	0–10, 0–25, 0–50, 0–100, 0–250 & 0–500 psig
OPERATING TEMPERATURE	-40° F to +500° F (-40° C to +260° C)
C _V COEFFICIENT	0.2 (standard) 0.005, 0.01, 0.025, 0.03, 0.04, 0.05, 0.06, 0.095, 0.12, 0.24, 0.3 (optional)
INLET & OUTLET CONNECTIONS	⅓″ FNPT

Features & Benefits

- Gas or liquid service
- Bubble tight shutoff
- Compact size
- Tefzel[®] or Kalrez[®] in flow stream

Options

- Panel mount (requires a 1³/₈" mounting hole)
- Extra ports
- Special welded connections
- Pressure gauges

GO Regulator

405 Centura Court • PO Box 4866 (29305) • Spartanburg, SC 29303 Phone (864) 574-7966 Fax (864) 574-5608 www.goreg.com • sales@goreg.com


Compact Stainless Steel Back Pressure Regulators

GE

Maximum Temperature and Control Pressures

How to Order

For additional configurations, consult the factory. **Standard items in bold.**

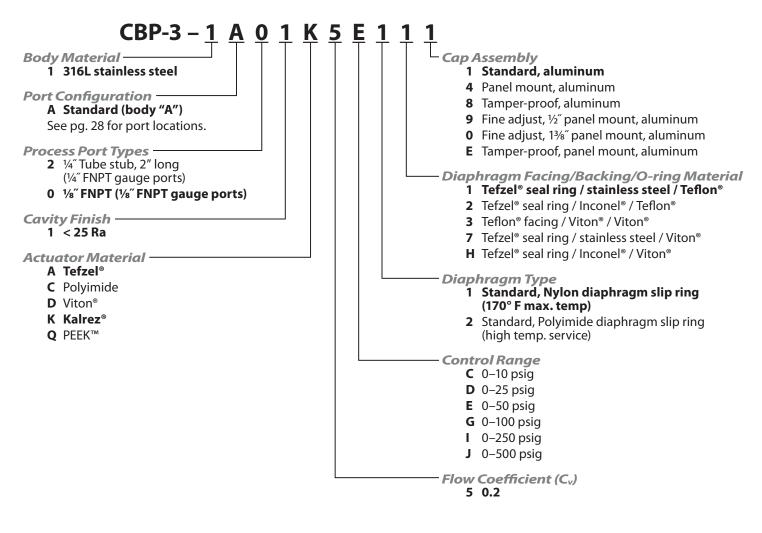

For flow curve charts, visit http://www.goreg.com.

Compact Stainless Steel Back Pressure Regulators

Outline and Mounting Dimensions

